

# KRITETACK

## INSTANT GRAB

Packaging:	P.E. cartridges of 290 ml (12 per box)
Color:	white
Application temperature:	+5 / +40
Application rate:	10 g/min
Flow:	<2 mm
Density:	1,57 g/mL
Skin over time:	10-15 min
Curing after 24 hours:	3 mm
UV, weather and water resistant:	yes
Frost resistant till -15°C during transport:	yes
Shelf life between +5°C and +25°C (unopened):	18 month
Joint movement capability:	± 25%
Temperature resistance after curing:	-40 / +100
Shore-A hardness (3 s):	55
100% Modulus (MPa (N/mm2)):	1,4
Tensile strength (MPa (N/mm2)):	2,2
Elongation at break:	335%


## TESTIMONIALS

After trying the Ritetack glue I was amazed at how good it was for my guys. We were building a wall and it was being screwed, filled, painted etc.. and I asked them to try the glue. It was so easy just to push it into place and it looks seamless. We have also tried it on a number of sign panels and found it to be quick, easy and strong. One of my staff commented that he had used it before in a previous company and his boss raved over it. I would highly recommend people to try it

David - QLD Signart Creations

We used Ritetack for CNC cut aluminium letters glued to the wall. It was great, fast & reliable. After application of Ritetack to the letters it was only position & a push & the job was done!

Mark - Damon Signs TAS

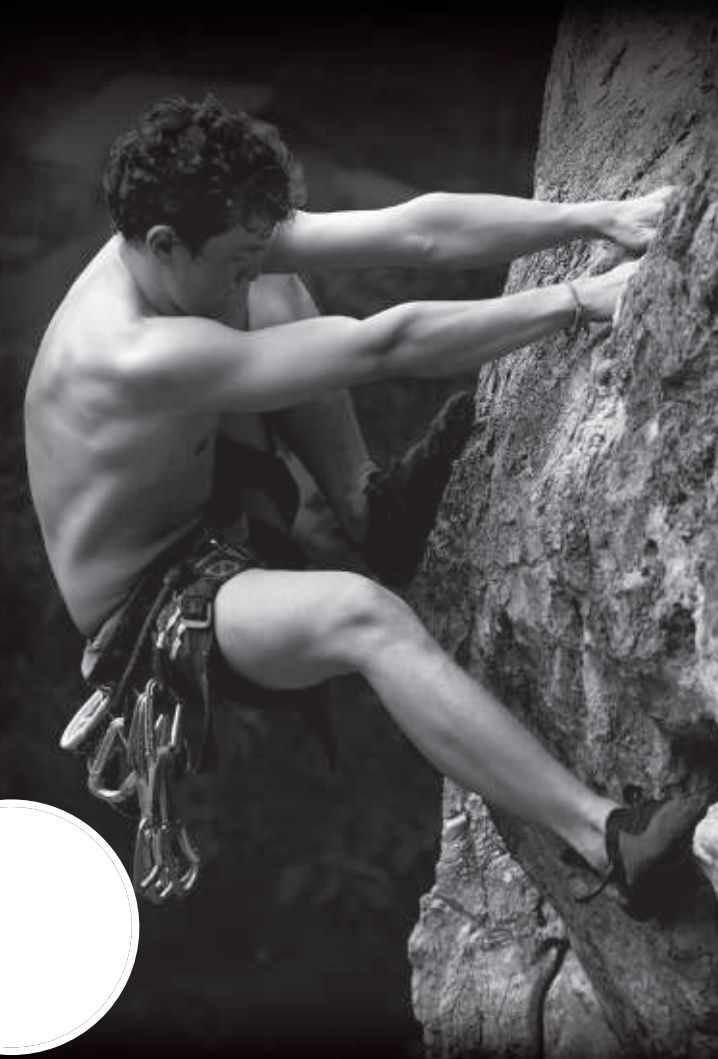

If you only have 2 hands!


**EXTREME STRENGTH CONSTRUCTION ADHESIVE**

**EXTREME STRENGTH CONSTRUCTION ADHESIVE**

# RITETACK IS A VERY HIGH QUALITY SINGLE COMPONENT MS POLYMER ADHESIVE WITH EXTREME INITIAL TACK

## SOME KEY FEATURES OF RITETACK ARE:

- Significantly reduces labour time, no waiting around!
- Eliminates the need for unsightly fixings or tiresome clamping and propping.
- Isocyanate, solvent, phthalate, PVC, silicone and odour FREE.
- Excellent resistance to UV, weather, moisture, chlorine and mould.
- Easy to extrude and apply with correct equipment.
- Grabs instantly, holding 200kg/m<sup>2</sup> vertically and 1000kg/m<sup>2</sup> horizontally when used to specification.
- Cures with atmospheric humidity.
- Retains elasticity and is paintable.
- Proven worldwide.

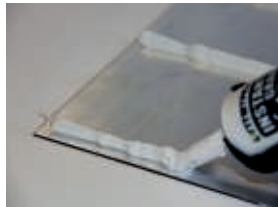

Erecting signs has never been easier, apply adhesive in stripes then position, push and admire!



This sign was constructed using Ritetack in less than half the time taken with props and fixings.

## APPLICATION:

- Must be applied in stripes that ventilate to the size of the "V" nozzle, not dots. Press well so adhesive is a minimum of 2-3mm between material & surface.
- Excess can be removed with ethanol wipes or mechanically be removed once set.

## APPLICATIONS:

- Instant, permanent bonding for interior and exterior applications across multiple industries.
- Universal, waterproof, assembly and construction adhesive for bonding of stone, concrete, mirrors, natural stone, plaster, PS, PU, PVC, polystyrene, ceramic tiles, enamel, copper, lead, zinc, aluminium, stainless steel, various metal, HPL and cement fibre boards, wood, glass, etc. Test prior to use.
- Adhesive, vibration-absorbing seam sealant for automotive bodywork and metal air ducts.
- Structural bonding in vibrating constructions.



Apply the adhesive as required... beats drilling and screwing any day!



Place that sign or letter where you want it with confidence that's where it will stay - no fixings needed!



Steel sections.




Even wall trims, position and go.



No more nails, screws, props, lost time or disasters - Ritetack makes installing cornices easy.



Place tiles in position, push, then walk away - it couldn't be easier!



Tiling becomes a breeze with Ritetack.



Applying Ritetack in stripes on tiles.

Item Code	Description	Packing
ET6-5000	Ritetack - 290ml - White ●	12 per box
ET6-5000B	Ritetack - 290ml - Black ●	12 per box
ET6-5000G	Ritetack - 290ml - Grey ●	12 per box



Mirrors perfectly placed with Ritetack... no propping and no downtime.

