

Keyboard table attachment

Item.no IS-80-TA03-N

Complete with:

1 top shelf, 1 bottom shelf
2 posts, 2 T-box connectors
and 4 feet

Can be used with the
**Wave, Compact and
Exhibit system.**



Extra
Bag for Keyboard table
Item IS-80-TB03



Screw in the 4 adjustable feet

Attach the bottom table to the system

Complete the posts

Attach the 2 T-box to the system


Attach the 2 posts and lock the bottom clamps.

Attach the table top and lock the top clamps


Mount the table graphic panel.

Mount the top graphic panel.

Graphic production

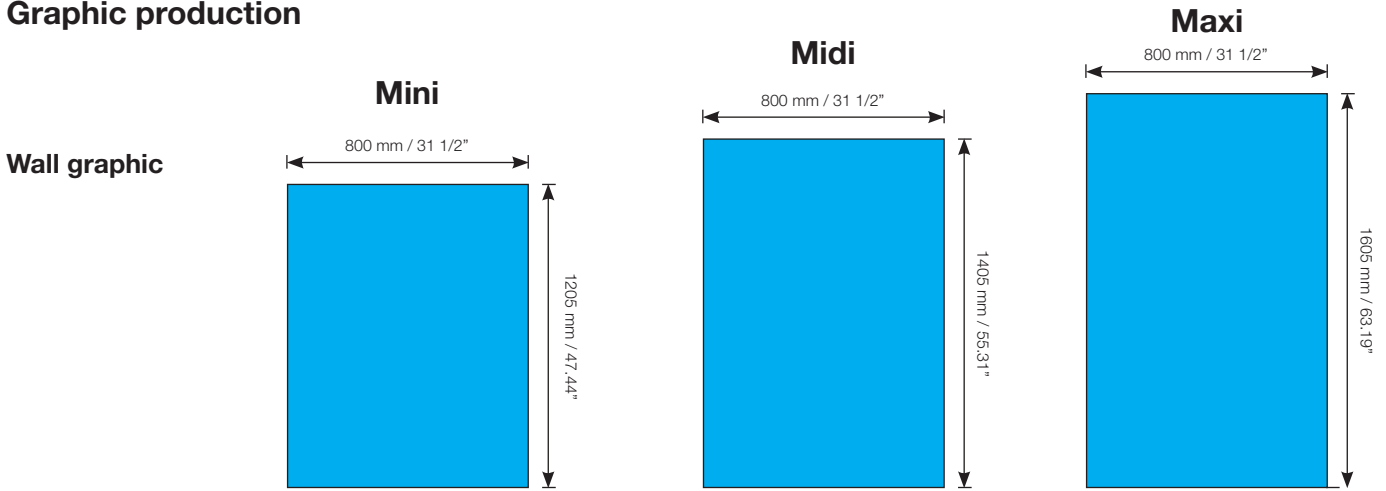

Keyboard graphic

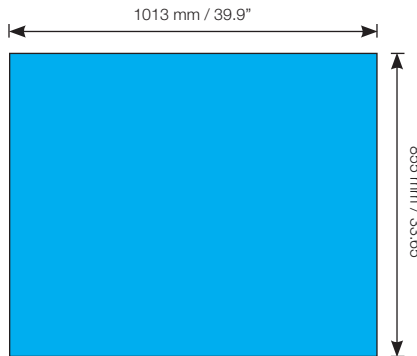



A template for the graphic panel production can be downloaded at:
www.isoframe.com/counters/downloads

Graphic panel attachments

Accessories

Kickers & Hangers
800 mm / 31 1/2" Item: IS-800-KHN

Magnetic tape (not incl.)
12 mm / 0.5", Item: 82281
24 mm / 1", Item: 82282

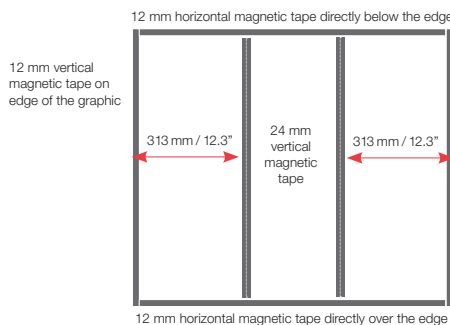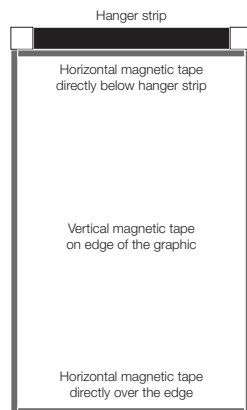

Printer material

We recommend the following material:

Poster paper: 180 gr / 0.4 lb.
The printed graphic panels must be laminated before use.
Front side: 125 microns (0,125 mm) / 0.005" "deep crystal"
Reverse side: 250 microns (0,250 mm) / 0.010" "stop light"

Polyester film: 330-370 microns (0,350 mm) / 0.013-0.015"
Top laminate: 125 microns (0,125 mm) / 0.005" "deep crystal"

Mounting of Hangers

Hangers to be fixed at the top of the wall graphic panel (reverse side).

Mounting of Magnetic Tape

Magnetic tape to be fixed on the graphic panels. (See picture)

IMPORTANT Carefully mount the magnetic tape slightly inset from the edge of the graphic panel by approximately 0,25 mm / 0.010". Once mounted, a very thin straight white line should show between the edge of the graphic and the outside edge of the magnetic tape. Do not exceed 0,5 mm / 0.020".

Application Techniques

To obtain optimum adhesion, the bonding surfaces must be well unified, clean and dry. Typical surface cleaning solvents are isopropyl alcohol/water mixture (rubbing alcohol) or heptane.

Note: Be sure to follow solvent manufacturer's precautions and directions for use when using solvents.